

## QL-400XT

### Semi-Automatic Stretch Wrapper

#### Work Smarter with our Patented XT Cut and Clamp®

Keep your driver on the forklift. Automatically capture the stretch film and cut it at the end of the wrap cycle.

- **Fully Mechanical**  
Requires no air or hot wire
- **Save two minutes per load**  
Keep your driver on the forklift and eliminate the on and off to cut and attach film



\*Shown with optional EZ Weigh Scale

**Load Guardian** is Lantech's patented control system that *creates, maintains* and *delivers* the right containment force for safe-to-ship loads every time. It minimizes operator interaction and eliminates the guess work for stretch wrapping any load configuration.




#### Ready-To-wrap Profiles



Ready-To-Wrap profiles allow operators to select the picture that closest matches the load they are trying to wrap and the machine makes all the adjustments.



#### Wrap Apps



Eliminates the need for operators to make machine adjustments for common load requirements (e.g. stack & band, stack & wrap, labels, cornerboards, top sheet, top box, short loads)



#### Reports



Report feature allows you to track machine performance. Cycle data, alarms, alarm history, production reports, profile usage and loads per hour. Downloadable and exportable.

# QL-400XT

## Specifications

### Performance

Peak Production Speed	Up to 30-40 loads/hr
Turntable Speed (Variable)	12 RPM
Turntable Drive	1 HP TEFC

### Load Handling

Turntable Size	1651 mm (65" Diameter)
Maximum Load Diagonal / Dimensions	1823 mm (72")
Maximum Load Height	2032 mm (80")
Maximum Load Weight	2268 kg (5000 lbs)


### Film Delivery System

Film Delivery System	Power Roller-Stretch PLUS
Standard Pre-Stretch	250%
E-Z Thread Roll Carriage	Standard
Wrapping Force	Variable (Electric)
Film Capacity	254 mm Diameter - 508 mm Length (10" Diameter - 20" Length)
Standard Film Width	500 mm (20") Optional 762 mm (30") Width
Laser Height Sensor	Standard
Auto Film Cut-off	Standard
Pallet Grip®	Standard

### Service Requirements

Electric	120 Volt 20 Amp-50 Hz
Pneumatic	N/A
NEMA Type 1 Enclosure	Standard
Wrap Cycle Pause	Standard
One Way Wrap	Standard
Service Support	24 Hrs/7 Days a week
Phone Number	(800) 866-0322

Warranty	5 years, unlimited cycles
----------	---------------------------

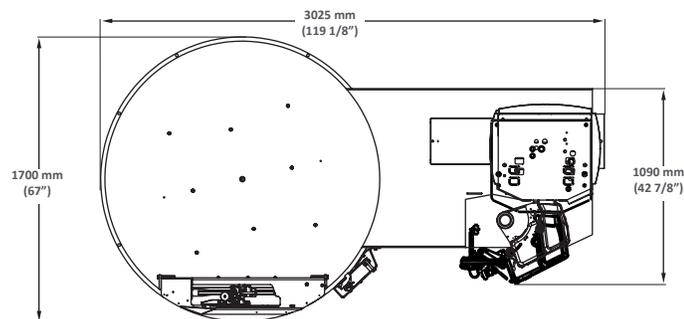

## Robustness

Hundreds of machine improvements based on 25 years of Q machine warranty experience. Wire connections, motors, reducers, and sensors are improved. Plus new controls.

## QL-400XT Standard Performance Package

- **Pallet Grip®**  
Keeps your loads from sliding off pallets during shipment.
- **Patented XT Cut and Clamp®**  
Automatically captures the stretch film and cuts it at the end of the wrap cycle.
- **Power Roller Stretch Plus™**  
Maximizes film delivery system performance.
- **NEMA Type 1 Enclosure**  
Protects control system electronics from dust, dirt and moisture.
- **2268 KG (5,000 LBS) Weight Capacity and 1 HP Turntable Drive Motor**
- **No Scheduled Preventative Maintenance.**

## Options

### EZ Weigh® Integrated Scale

Weigh and Wrap in One Easy Step!



## Upgrade

### Click-n-Go™

Stretch wrapping loads at the touch of a button!

Eliminates requirement to install a ceiling-mounted lanyard.

Each unit can handle up to 3 machines with 5 load profiles per machine.



## Click or Scan to Learn More



QL Side by Side  
Video



Lantech.com